arXiv:1403.6561v1 [cs.IT] 26 Mar 2014

Transmit Power Minimization for MIMO Systems of Exponential Average BER with Fixed Outage Probability

Dian-Wu Yue and Yichuang Sun

Abstract

This paper is concerned with a wireless system operating in MIMO fading channels with channel state information being known at both transmitter and receiver. By *spatiotemporal* subchannel selection and power control, it aims to minimize the average transmit power (ATP) of the MIMO system while achieving an exponential type of average bit error rate (BER) for each data stream. Under the constraints of a given fixed individual outage probability (OP) and average BER for each subchannel, based on a traditional upper bound and a dynamic upper bound of Q function, two closed-form ATP expressions are derived, respectively, and they correspond to two different power allocation schemes. Numerical results are provided to validate the theoretical analysis, and show that the power allocation scheme with the dynamic upper bound can achieve more power savings than the one with the traditional upper bound.

Index Terms

Multiple-input multiple-output (MIMO) system, power control, channel selection, multi-beam, fading channel, multiplexing, diversity.

This work was supported in part by the Scheme of Research Exchanges with China and India, the Royal Academy of Engineering of UK, the Specialized Research Fund for the Doctoral Program of Higher Education under Grant 20132125110006, and the Fundamental Research Funds for the Central Universities under grant 3132013334.

Dian-Wu Yue is with the College of Information Science and Technology, Dalian Maritime University, Dalian, Liaoning 116026, China (e-mail: dianwuyue@yahoo.com). Yichuang Sun is with the School of Engineering and Technology, University of Hertfordshire, College Lane, Hatfield, Herts AL10 9AB, UK, (Email: y.sun@herts.ac.uk).

I. Introduction

Wireless transmission using multiple antennas has attracted much interest in the past couple of decades due to its capability to exploit the tremendous capacity inherent in multiple-input multiple-output (MIMO) channels [1]. Various aspects of wireless MIMO systems have been studied intensively. All theoretical analysis for MIMO systems in the literature can be roughly divided into two categories: capacity analysis for the system efficiency [2] and performance analysis for the system reliability [3]. Certainly, there are some papers in between that simultaneously consider the system efficiency and reliability, leading to some fundamental tradeoff between the two [4]- [6].

Adaptive transmission techniques can utilize the resources efficiently and thus, are always of great interest in the field of wireless communications, especially for the current multiple antenna systems. The basic motivation behind adaptive transmission is to obtain improvements in terms of average spectral efficiency or bit-error rate (BER) by exploiting the channel knowledge available at transmitter. The optimal power control policy that maximizes the fading channel capacity is shown to be of waterfilling type from the information theoretic point of view [7]. On the other hand, dating back to early 1968, Hayes [8] considered adaptive power control problem for single antenna systems, resulting in an optimal power strategy that minimizes the BER subject to an average power constraint. Based on optimization theory and random matrix theory, several novel adaptation transmit schemes including optimal power control policies in multiple antenna systems have been already proposed [9]- [13].

It is well known that in an additive white Gaussian noise (AWGN) channel, a single-input single-output (SISO) wireless system with coherent signalling schemes [14] can have a BER exponentially decreasing with the signal-to-noise ratio (SNR), or equivalently, achieve an infinite diversity order. When the same system operates in a Rayleigh fading channel, however, its average BER decreases only inversely with the SNR. The degradation can be partially mitigated if we replace the SISO system with MIMO. In spite of various efforts, nearly all existing MIMO system schemes can only achieve a finite diversity order, even with spatial power control [15], [16].

However, Rangarajan *et al* showed for the first time in [17] and [18] that by adaptive power control in time, a SISO system can have a BER performance with exponential diversity order in Rayleigh fading. Subsequently, Sharma *et al* analyzed optimal adaptive power transmission policies for MIMO systems, and showed how to use a combined temporal and spatial adaptive policy to obtain an exponential diversity order for MIMO systems in Rayleigh fading [19], [20]. The aforementioned results require perfect channel-state information (CSI) at both the transmitter and receiver. In [21], Khan further showed that the exponential diversity order can be achieved in "all" fading channels. Moreover, the authors in [22] presented two different power allocation strategies of achievable exponential diversity

order for wireless multihop systems. In addition to the total average power constraint, when the more realistic scenario of peak to average power ratio (PAPR) constraint is also satisfied, papers [23] and [24] considered such an optimal power control problem for MISO channels and obtained the minimized BER of exponential diversity. Even in the practical case with imperfect CSI at the transmitter, papers [25] and [26] showed that in Rayleigh fading environments the exponential diversity order can also be obtained by appropriate spatiotemporal power allocation.

It should be noticed that in the existing techniques to achieve an exponential diversity order as mentioned above, an MIMO system is only allowed to transmit a single information stream along one of its eigen beams. Although orthogonal space-time block coding (OSTBC) is also discussed in [19], it is indeed equivalent to a SISO (or alternatively, called single beamforming) system [27]. In this paper, we will adopt multi-channel beamforming ([3], [9]) to utilize efficiently the degree of freedom provided by multiple antennas. In addition, obviously different from the optimal control strategy adopted in [17]- [26] that minimize the system BER under the average transmit power constraint, we will pursue another optimal control strategy of minimizing average transmit power under individual average BER and outage probability (OP) constraints for each data stream. This strategy is consistent with the current efforts of green communications [28], [29]. And the average BER will be expressed as an exponential function of SNR, which implies that the underlying MIMO system has exponential diversity order.

The rest of the paper is organized as follows. In Section II, we describe the system model and present the optimization problems. In Section III, with the help of an order statistical result of eigenvalues of complex central Wishart matrices, we derive a closed-form ATP expression based on the traditional upper bound of Q function. In Section IV, we present a dynamic upper bound of Q function, and based on it derive further another closed-form ATP expression. After that, in Section V we provide some numerical results to validate the theoretical analysis and make comparisons between the two different power allocation schemes. Finally, in Section VI we conclude the paper.

II. System Model And Optimization Formulation

A. System model

We first consider a single-user MIMO system operating in flat fading environments with $n_T \geq 1$ transmit antennas and $n_R \geq 1$ receive antennas, and assume that perfect CSI is available at both the transmitter and the receiver. We denote by h_{ij} the channel gain between i-th receive antenna and j-th transmit antenna, and by $\mathbf{H}$ the corresponding channel gain matrix whose i,j-th entry is h_{ij}. In Rayleigh fading environments, it is further assumed that h_{ij} is independent and identically distributed (i.i.d.) and thus $\mathbf{H}$ follows the joint complex Gaussian distribution with zero mean matrix

and covariance matrix $\mathbf{I}_{n_R} \otimes \mathbf{I}_{n_T}$, i.e., $\mathbf{H} \sim \mathbb{CN}(0, \mathbf{I}_{n_R} \otimes \mathbf{I}_{n_T})$ (see [30] for these notations). For a transmission through the MIMO channel with $\mathbf{H}$, the $n_R \times 1$ received vector can be expressed as

$$\mathbf{y} = \mathbf{H}\mathbf{x} + \mathbf{n} \tag{1}$$

where $\mathbf{x}$ is the $n_T \times 1$ transmitted vector and $\mathbf{n}$ is the $n_R \times 1$ additive noise vector following complex Gaussian distribution of zero-mean vector and covariance matrix $\mathbf{I}_{n_R}$, i.e., $\mathbf{n} \sim \mathbb{CN}(0, \mathbf{I}_{n_R})$.

Now let $m = \min\{n_T, n_R\}$ and $n = \max\{n_T, n_R\}$. Define

$$\mathbf{\Omega} = \begin{cases} \mathbf{H}^\dagger\mathbf{H}, & \text{for } m = n_T; \\ \mathbf{H}\mathbf{H}^\dagger, & \text{for } n = n_T. \end{cases} \tag{2}$$

From Chapter 3 of [30], it follows that the matrix $\mathbf{\Omega}$ follows Wishart distribution, i.e., $\mathbf{\Omega} \sim \mathbb{CW}(n, \mathbf{I}_m)$. Following the conventional spatial multiplexing method based on singular value decomposition(SVD) [31], [32], the channel matrix can be written as

$$\mathbf{H} = \mathbf{U}\mathbf{\Lambda}\mathbf{V}^\dagger \tag{3}$$

where $\mathbf{U}$ and $\mathbf{V}$ are unitary matrices, and

$$\mathbf{\Lambda} = \text{diag}(\sqrt{\lambda_1}, \sqrt{\lambda_2}, \ldots, \sqrt{\lambda_m}) \tag{4}$$

with $\{\lambda_i : i = 1, 2, \ldots, m\}$ being the eigenvalues of $\mathbf{\Omega}$ sorted in descending order, i.e.,

$$\lambda_1 \geq \lambda_2 \geq \cdots \geq \lambda_m. \tag{5}$$

Thus we can transmit $r \leq m$ data symbols at one time. Since $\mathbf{H}$ is known perfectly at the transmitter, we can set the transmitted vector as

$$\mathbf{x} = \mathbf{V}_1^r\mathbf{P}\mathbf{s} \tag{6}$$

where $\mathbf{s}$ is the $r \times 1$ modulated data vector with covariance matrix $\mathbf{I}_r$, $\mathbf{V}_1^r$ is the precoding matrix formed with the first r columns of $\mathbf{V}$ associated with the first r largest eigenvalues of $\mathbf{\Omega}$, and $\mathbf{P}$ is a diagonal matrix as follows:

$$\mathbf{P} = \text{diag}(\sqrt{p_1}, \sqrt{p_2}, \ldots, \sqrt{p_r}) \tag{7}$$

where $\{p_i : i = 1, 2, \ldots, r\}$ are the powers allocated to the r established data streams. Due to the assumption that CSI is available at the receiver, the symbols transmitted through the receive filter are recovered from the received vector $\mathbf{y}$ with matrix $\mathbf{U}_1^r$, defined similarly to $\mathbf{V}_1^r$, as

$$\begin{aligned} \hat{\mathbf{s}} &= (\mathbf{U}_1^r)^\dagger(\mathbf{H}\mathbf{x} + \mathbf{n}) \\ &= \mathbf{\Lambda}_1^r\mathbf{P}\mathbf{s} + (\mathbf{U}_1^r)^\dagger\mathbf{n} \end{aligned} \tag{8}$$

where $\mathbf{\Lambda}_1^r$ is a diagonal submatrix of $\mathbf{\Lambda}$ that contains the r largest eigenvalues in descending order, and the filter-processed noise $\eta = (\mathbf{U}_1^r)^\dagger \mathbf{n}$ has the same statistical properties as $\mathbf{n}$, possibly with a reduced dimension. Each data stream then experiences an instantaneous SNR given by

$$\text{SNR}_i = \lambda_i p_i, \quad i = 1, 2, \ldots, r. \tag{9}$$

And the corresponding short term BER is expressed as

$$P_b^{(i)} = \xi_i Q(\sqrt{\beta_i \text{SNR}_i}) \tag{10}$$

where $Q(\cdot)$ is the Gaussian Q function, and the parameters ξ_i and β_i are constants, depending on the used modulation type [33].

B. Optimization formulation

It is well-known that the OP is defined as the probability when the instantaneous SNR falls below a certain threshold [34]. At this time when the i-th subchannel is in bad condition, in order to save transmit power, the subchannel should have a transmit outage temporarily. For this reason, in order to analyze conveniently, here we set the SNR threshold as $p_i \overline{\lambda}_{\text{out}}(i)$ for the i-th subchannel. So we will introduce a transmit outage when $\lambda_i < \overline{\lambda}_{\text{out}}(i)$. Accordingly, the individual OP is expressed as

$$P_{\text{out}}^{(i)} = \int_0^{\overline{\lambda}_{\text{out}}{}^{(i)}} f_i(\lambda_i) d\lambda_i \tag{11}$$

where $f_i(\lambda_i)$ is the p.d.f. of eigenvalue λ_i.

Once the OP is given, we can carry on adaptive transmission. In particular, based on channel eigenvalues, we can select those MIMO subchannels satisfying the OP constraint condition to transmit data streams, and let each of them transmit a data stream. In order to utilize efficiently MIMO subchannels, we should employ all those satisfactory subchannels to communicate. Note that if any subchannel does not satisfy the constraint, then this implies that the subchannel cannot transmit a data stream, and thereby we force the channel into the state of channel outage; and if none of the MIMO subchannels satisfies the constraint, then this will result in a system outage.

The above-mentioned adaptive transmission involves not only channel selection but also power control, both of which are conducted based on the status of eigenvalues of channel matrix. As already mentioned before, our adaptive power allocation strategy aims at minimizing the total ATP while each data stream achieves an exponential average BER. For this reason, under the constraint that both the individual OP $P_{\text{out}}^{(i)}$ and the individual average BER $\overline{P}_b(i)$ are given, this optimal problem can be formulated as

$$\begin{cases} \underset{\{p_i: 1 \le i \le m\}}{\text{Minimize}} & \rho = \mathbb{E}\{\sum_{i=1}^m p_i\}; \\ \text{Subject to} & \frac{\mathbb{E}P_b^{(i)}}{\overline{P}_o(i)} \le \overline{P}_b(i), \quad 1 \le i \le m \end{cases} \tag{12}$$

where $\overline{P}_o(i) = 1 - P_{\text{out}}^{(i)}$ denotes the transmit probability, and $\mathbb{E}P_b^{(i)} = \int_{\overline{\lambda}_{\text{out}^{(i)}}}^{\infty} P_b^{(i)} f_i(\lambda_i) d\lambda_i = \int_{\overline{\lambda}_{\text{out}^{(i)}}}^{\infty} \xi_i Q(\sqrt{\beta_i \lambda_i p_i}) f_i(\lambda_i) d\lambda_i$ with $\mathbb{E}(\cdot)$ standing for the expectation operator. On the other hand, the required BER $\overline{P}_b(i)$ can be expressed as an exponential function of SNR:

$$\overline{P}_b(i) = \frac{\xi_i}{2} e^{-\beta_i \widehat{\text{SNR}}_{(i)}/2}. \tag{13}$$

It should be pointed out that the SNR $\widehat{\text{SNR}}(i)$ can be designed beforehand.

Obviously, this optimization problem can be translated into m individual optimization problems, and each corresponds to an ordered subchannel:

$$\begin{cases} \underset{\{p_i\}}{\text{Minimize}} & \mathbb{E}\{p_i\}; \\ \text{Subject to} & \mathbb{E}P_b^{(i)} \leq \overline{P}_o(i)\overline{P}_b(i). \end{cases} \tag{14}$$

Applying Lagrange Multiplier Method to each of the above sub-optimization problems, we get the following family of unconstrained optimization problems parameterized by multipliers $\omega_i > 0, \quad 1 \leq i \leq m$:

$$\underset{\{p_i\}}{\text{Min}} \int_{\overline{\lambda}_{\text{out}^{(i)}}}^{\infty} p_i f_i(\lambda_i) d\lambda_i + \omega_i \int_{\overline{\lambda}_{\text{out}^{(i)}}}^{\infty} P_b^{(i)} f_i(\lambda_i) d\lambda_i - \omega_i \overline{P}_o(i)\overline{P}_b(i). \tag{15}$$

or

$$\underset{\{p_i\}}{\text{Min}} \int_{\overline{\lambda}_{\text{out}^{(i)}}}^{\infty} [p_i + \omega_i (P_b^{(i)} - \overline{P}_b(i))] f_i(\lambda_i) d\lambda_i. \tag{16}$$

If we make use of the exact expression of $P_b^{(i)} = \xi_i Q(\sqrt{\beta_i \text{SNR}_i})$ to solve the problems, then due to the relatively complicated Q function, we can only have an unclosed-form expression based on the Lambert W function [35]. Similar to [19] and [22], we also employ the common upper bound $Q(x) \leq \frac{1}{2} e^{-x^2/2}$ to replace the exact expression and obtain easily a suboptimum solution as follows:

$$p_i = \begin{cases} \frac{2}{\beta_i \lambda_i} \ln(\frac{\lambda_i}{\lambda_0^{(i)}}) & \text{for} \lambda_i > \lambda_0(i); \\ 0 & \text{for} \lambda_i \leq \lambda_0(i). \end{cases} \tag{17}$$

where $\lambda_0(i) = \max\{\lambda_0^{(i)}, \overline{\lambda}_{\text{out}}(i)\}$ and $\lambda_0^{(i)}$ can be found by solving

$$\int_{\lambda_0(i)}^{\infty} \frac{\xi_i}{2} e^{-\beta_i p_i \lambda_i/2} f_i(\lambda_i) d\lambda_i = \overline{P}_o(i)\overline{P}_b(i). \tag{18}$$

This suboptimum solution will provide convenience for us to produce theoretical and numerical results.

III. Minimum Average Transmit Power and A Power Allocation Scheme

A. Individual outage probability

It follows from [36] that the marginal p.d.f. of the i-th largest eigenvalue $\lambda_i, \ i = 1, 2, \ldots, m$, can be expressed as a sum of terms $\lambda_i^a e^{-b\lambda_i}$, which is very friendly for further analysis. By the expression, we can easily get the following expression of individual outage probability.

Lemma 1: The individual OP for the i data stream can be given by

$$P_{\text{out}}^{(i)} = \sum_{k=i}^{m} (-1)^{k-i} \binom{k-1}{i-1} \binom{m}{k} \overline{F}_{\text{min:}k}^{(\text{out})}(\overline{\lambda}_{\text{out}}(i)) \tag{19}$$

where $\overline{F}_{\text{min:}k}^{(\text{out})}(\overline{\lambda}_{\text{out}}(i))$ denotes the distribution function of the smallest random variable considered in a subset of k random variables over the random variable set of all eigenvalues $\{\lambda_i,\ i = 1, 2, \ldots, m\}$, and is given by [36]

$$\begin{aligned} \overline{F}_{\text{min:}k}^{(\text{out})}(\overline{\lambda}_{\text{out}}(i)) &= \frac{kC}{m!} \sum_{\alpha} \sum_{\mu} \text{sgn}(\alpha)\text{sgn}(\mu) A_k(\alpha, \mu) \\ &\times \sum\nolimits_{\tau} \frac{\gamma(\theta + \alpha_k + \mu_k - 1 + \sum_{\iota=1}^{k-1} \tau_\iota, k\overline{\lambda}_{\text{out}}(i))}{k^{\theta+\alpha_k+\mu_k-1+\sum_{\iota=1}^{k-1}\tau_\iota}} \\ &\times \prod_{\iota=1}^{k-1} \frac{(\theta + \alpha_\iota + \mu_\iota - 2)!}{\tau_\iota!} \end{aligned} \tag{20}$$

where $\theta = n - m$, C is a constant standing for

$$C = \frac{1}{\prod_{j=1}^{m}(m-j)! \prod_{j=1}^{m}(n-j)!}, \tag{21}$$

$\text{sgn}(\alpha)$ denotes the sign of permutation $\alpha = (\alpha_1, \alpha_2, \ldots, \alpha_m)$ for integers $\{1, 2, \ldots, m\}$, $A_k(\alpha, \mu)$ is defined as

$$A_k(\alpha, \mu) = \prod_{\iota=k+1}^{m} (\theta + \alpha_\iota + \mu_\iota - 2)!, \tag{22}$$

and $\sum_{\tau}$ denotes

$$\sum\nolimits_{\tau} = \sum_{\tau_1=0}^{\theta+\alpha_1+\mu_1-2} \sum_{\tau_2=0}^{\theta+\alpha_2+\mu_2-2} \cdots \sum_{\tau_{k-1}=0}^{\theta+\alpha_{k-1}+\mu_{k-1}-2}. \tag{23}$$

Moreover, $\gamma(q, x)$ is just the incomplete gamma function (See Page 454 of [37]).

On the other hand, the global outage probability for the whole system is written as

$$\begin{aligned} P_{\text{out}} &= \text{Prob}(\lambda_i < \overline{\lambda}_{\text{out}}(i),\ \ 1 \le i \le m) \\ &\le P_{\text{out}}^{(1)}. \end{aligned} \tag{24}$$

When $\overline{\lambda}_{\text{out}}(i) = \lambda_{\text{out}}$ for $1 \le i \le m$, we can have

$$P_{\text{out}} = P_{\text{out}}^{(1)}. \tag{25}$$

B. Another BER constraint condition

In order to provide convenience for the system design, we hope that $\lambda_0(i) = \overline{\lambda}_{\text{out}}(i)$. For this reason, we revisit the derivation process of optimum solution in Subsection II.B, and rewrite the expression (17) as

$$p_i = \begin{cases} \frac{\widehat{\text{SNR}}(i)}{\lambda_i} + \frac{2}{\beta_i \lambda_i} \ln(\frac{\lambda_i \Delta(i)}{\overline{\lambda}_{\text{out}}(i)}), & \text{for } \lambda_i > \overline{\lambda}_{\text{out}}(i) \\ 0, & \text{for } \lambda_i \le \overline{\lambda}_{\text{out}}(i) \end{cases} \tag{26}$$

where the unknown optimization parameter $\Delta(i)$ should meet the following BER constraint condition:

$$\int_{\overline{\lambda}_{\text{out}}(i)}^{\infty} \frac{\xi_i}{2} e^{-\beta_i p_i \lambda_i/2} f_i(\lambda_i) d\lambda_i = \overline{P}_o(i)\overline{P}_b(i). \tag{27}$$

Substituting (26) and (13) into (27), we have after a simplifying process

$$\overline{P}_b(i) \int_{\overline{\lambda}_{\text{out}}(i)}^{\infty} \frac{\overline{\lambda}_{\text{out}}(i)}{\lambda_i \Delta(i)} f_i(\lambda_i) d\lambda_i = \overline{P}_o(i)\overline{P}_b(i). \tag{28}$$

(28) can be simplified further to

$$\Delta(i) = \overline{\lambda}_{\text{out}}(i) \int_{\overline{\lambda}_{\text{out}}(i)}^{\infty} \frac{1}{\lambda_i} f_i(\lambda_i) d\lambda_i / \overline{P}_o(i). \tag{29}$$

From the theorem of integral mean value, there is a constant g satisfying

$$\int_{\overline{\lambda}_{\text{out}}(i)}^{\infty} \frac{1}{\lambda_i} f_i(\lambda_i) d\lambda_i = g\overline{P}_o(i). \tag{30}$$

With g, we can define a new function of $\overline{\lambda}_{\text{out}}(i)$ as follows:

$$\overline{\lambda}_{\text{mea}}(i) = \frac{1}{g} = \frac{\overline{P}_o(i)}{\int_{\overline{\lambda}_{\text{out}}(i)}^{\infty} \frac{1}{\lambda_i} f_i(\lambda_i) d\lambda_i}. \tag{31}$$

Furthermore, it can follow from the theorem of integral mean value that

$$\overline{\lambda}_{\text{mea}}(i) \geq \overline{\lambda}_{\text{out}}(i). \tag{32}$$

Then $\Delta(i)$ can be rewritten as

$$\Delta(i) = \frac{\overline{\lambda}_{\text{out}}(i)}{\overline{\lambda}_{\text{mea}}(i)}. \tag{33}$$

Taking account of the requirement of $p_i \geq 0$, from (26) $\Delta(i)$ should also meet another BER constraint condition:

$$\frac{\widehat{\text{SNR}}(i)}{\lambda_i} + \frac{2}{\beta_i \lambda_i} \ln\left(\frac{\lambda_i \Delta(i)}{\overline{\lambda}_{\text{out}}(i)}\right) \geq 0 \tag{34}$$

or

$$\Delta(i) \geq \frac{\overline{\lambda}_{\text{out}}(i)}{\lambda_i} e^{-\beta_i \widehat{\text{SNR}}(i)/2} \tag{35}$$

Due to the fact of $\lambda_i \geq \overline{\lambda}_{\text{out}}(i)$, the constraint condition becomes under the help of (13)

$$\Delta(i) \geq \frac{2}{\xi_i} \overline{P}_b(i). \tag{36}$$

By (33), the constraint condition can be rewritten as

$$\overline{P}_b(i) \leq \frac{\xi_i}{2} \frac{\overline{\lambda}_{\text{out}}(i)}{\overline{\lambda}_{\text{mea}}(i)}. \tag{37}$$

So we have the following lemma finally.

Lemma 2: If $\overline{P}_b(i) \leq \frac{\xi_i}{2} \frac{\overline{\lambda}_{\text{out}}(i)}{\overline{\lambda}_{\text{mea}}(i)}$, then,

$$\lambda_0(i) = \overline{\lambda}_{\text{out}}(i) \tag{38}$$

and the optimum solution of power allocation is (26).

C. Minimum average transmit power

Under the constraint (37), we now consider to derive the minimum average transmit power. The derivation is not difficult, but involves a process employing an unusual special function appeared in [38]. Finally, we obtain the following result and provide a detailed proof in Appendix.

Proposition 1: Suppose that $\overline{P}_b(i) \leq \frac{\xi_i}{2}\frac{\overline{\lambda}_{\text{out}}(i)}{\overline{\lambda}_{\text{mea}}(i)}$. Let $\hat{\rho}^{(i)}(\overline{P}_b(i), P_{\text{out}}^{(i)})$ denote the average needed transmit power for i-th data stream achieving the BER given by (13) under the condition that the OP $P_{\text{out}}^{(i)}$ is given. Then

$$\begin{aligned}\hat{\rho}^{(i)}(\overline{P}_b(i), P_{\text{out}}^{(i)}) &= \rho_s(\overline{P}_b(i), P_{\text{out}}^{(i)}) + \rho_\Delta(P_{\text{out}}^{(i)}) \\ &= \rho_s(\widehat{\text{SNR}}(i), \overline{\lambda}_{\text{out}}(i)) + \rho_\Delta(\overline{\lambda}_{\text{out}}(i)) \end{aligned} \tag{39}$$

where

$$\rho_s(\widehat{\text{SNR}}(i), \overline{\lambda}_{\text{out}}(i)) = \sum_{k=i}^{m}(-1)^{k-i}\binom{k-1}{i-1}\binom{m}{k}\overline{F}_{\text{min:}k}^{(\text{pow})}(\widehat{\text{SNR}}(i), \overline{\lambda}_{\text{out}}(i)). \tag{40}$$

Moreover, $\overline{F}_{\text{min:}k}^{(\text{pow})}(\widehat{\text{SNR}}(i), \overline{\lambda}_{\text{out}}(i))$ is the complementary distribution function of the smallest random variable considered in a subset of k random variables over the random variable set of all eigenvalues, which corresponds to $\overline{F}_{\text{min:}k}^{(\text{out})}(\overline{\lambda}_{\text{out}}(i))$, and is given by

$$\begin{aligned}&\overline{F}_{\text{min:}k}^{(\text{pow})}(\widehat{\text{SNR}}(i), \overline{\lambda}_{\text{out}}(i)) = \widehat{\text{SNR}}(i)\cdot\frac{kC}{m!}\sum_{\alpha}\sum_{\mu}\text{sgn}(\alpha)\text{sgn}(\mu)\times \\ &A_k(\alpha,\mu)\sum\nolimits_{\tau}\frac{\Gamma(\theta+\alpha_k+\mu_k-2+\sum_{\iota=1}^{k-1}\tau_\iota, k\overline{\lambda}_{\text{out}}(i))}{k^{\theta+\alpha_k+\mu_k-2+\sum_{\iota=1}^{k-1}\tau_\iota}} \\ &\times\prod_{\iota=1}^{k-1}\frac{(\theta+\alpha_\iota+\mu_\iota-2)!}{\tau_\iota!}.\end{aligned} \tag{41}$$

In the above equation, $\Gamma(q,x)$ is just the complementary incomplete gamma function (See Page 454 of [37]).

For the second term $\rho_\Delta(\cdot)$, it is independent of $\widehat{\text{SNR}}(i)$, and is given by

$$\rho_\Delta(\overline{\lambda}_{\text{out}}(i)) = \sum_{k=i}^{m}(-1)^{k-i}\binom{k-1}{i-1}\binom{m}{k}\overline{F}_{\text{min:}k}^{(\text{del})}(\overline{\lambda}_{\text{out}}(i)) \tag{42}$$

where $\overline{F}_{\text{min:}k}^{(\text{del})}(\overline{\lambda}_{\text{out}}(i))$ corresponds to $\overline{F}_{\text{min:}k}^{(\text{pow})}(\widehat{\text{SNR}}(i), \overline{\lambda}_{\text{out}}(i))$, and is given by

$$\begin{aligned}&\overline{F}_{\text{min:}k}^{(\text{del})}(\overline{\lambda}_{\text{out}}(i)) = \frac{kC}{m!}\sum_{\alpha}\sum_{\mu}\text{sgn}(\alpha)\text{sgn}(\mu)A_k(\alpha,\mu) \\ &\times\sum\nolimits_{\tau}\frac{2\cdot\boldsymbol{\jmath}(N_k(\boldsymbol{\tau}), k\overline{\lambda}_{\text{out}}(i), \Delta(i))}{\beta_i k^{N_k(\boldsymbol{\tau})}} \\ &\times\prod_{\iota=1}^{k-1}\frac{(\theta+\alpha_\iota+\mu_\iota-2)!}{\tau_\iota!}\end{aligned} \tag{43}$$

with

$$N_k(\boldsymbol{\tau}) = \theta + \alpha_k + \mu_k - 2 + \sum_{\iota=1}^{k-1} \tau_\iota \tag{44}$$

and

$$\begin{aligned} \boldsymbol{\jmath}(N_k(\boldsymbol{\tau}), k\overline{\lambda}_{\text{out}}(i), \Delta(i)) &= (N_k(\boldsymbol{\tau}) - 1)! \cdot \sum_{\iota=0}^{N_k(\boldsymbol{\tau})-1} \frac{\Gamma(\iota, k\overline{\lambda}_{\text{out}}(i))}{\iota!} \\ &+ \Gamma(N_k(\boldsymbol{\tau}), k\overline{\lambda}_{\text{out}}(i)) \cdot \ln \Delta(i). \end{aligned} \tag{45}$$

IV. Modified Power Allocation Scheme

A. A dynamic upper bound of Q function

Fig.1 makes comparison between Q function $Q(\sqrt{2\text{SNR}})$ and its traditional upper bound $\frac{1}{2}e^{-\text{SNR}/2}$. As seen in Fig.1, at the important BER region their SNR deviation is relatively large and slowly becomes small as SNR increases. For example, when $P_b = 10^{-6}$, the SNR deviation is 0.65 dB.

Therefore, in order to improve the system performance, we consider to find a new upper bound of Q function replacing the old one and with it give a modified power allocation scheme. In order to continue to employ the analysis method given in Section III, we now need to study the following type of exponential upper bounds of Q function:

$$Q(\sqrt{2\text{SNR}}) \leq \frac{1}{c(\text{SNR})} e^{-\text{SNR}/2} \tag{46}$$

Note that different from the old upper bound, here we allow the designated parameter c(SNR) to be dynamically variable.

For any given BER $= Q(\sqrt{2\text{SNR}})$, we easily find a $c(\text{SNR})$ which makes the new upper bound to approximate appropriately to the given BER. At the BER region from 10^{-3} to 10^{-8} Fig.1 also plots the new upper bound by using some appropriate values of $c(\text{SNR})$.

As seen in Fig.1, the dynamic upper bound approximates well to the exact value of Q function. The computed results are also presented in Table I. From the table, it can be observed that the optimized value of parameter c increases as the SNR increases. Therefore, we have the following property of Q function:

Lemma 3: If $Q(\sqrt{2\text{SNR}}) \leq \frac{1}{c(\text{SNR})} e^{-\text{SNR}/2}$ for a given SNR, then

$$Q(\sqrt{2(\text{SNR} + \Lambda)}) \leq \frac{1}{c(\text{SNR})} e^{-(\text{SNR}+\Lambda)/2}, \ \Lambda > 0. \tag{47}$$

B. Modified minimum ATP

For any given $\overline{P}_b(i)$, we can find appropriate $\widetilde{\text{SNR}}(i)$ and $c(\widetilde{\text{SNR}}(i))$ satisfying

$$\overline{P}_b(i) \approx \frac{\xi_i}{c(\widetilde{\text{SNR}}(i))} e^{-\beta_i(i)\widetilde{\text{SNR}}(i)/2}. \tag{48}$$

With the help of Lemma 3, thus the power allocation scheme can be modified as

$$p_i = \begin{cases} \frac{\widetilde{\text{SNR}}(i)}{\lambda_i} + \frac{2}{\beta_i \lambda_i} \ln(\frac{\lambda_i \Delta(i)}{\overline{\lambda}_{\text{out}}(i)}), & \text{for } \lambda_i > \overline{\lambda}_{\text{mea}}(i) \\ \frac{\widehat{\text{SNR}}(i)}{\lambda_i} + \frac{2}{\beta_i \lambda_i} \ln(\frac{\lambda_i \Delta(i)}{\overline{\lambda}_{\text{out}}(i)}), & \text{for } \overline{\lambda}_{\text{out}}(i) < \lambda_i \leq \overline{\lambda}_{\text{mea}}(i) \\ 0, & \text{for } \lambda_i \leq \overline{\lambda}_{\text{out}}(i) \end{cases} \tag{49}$$

With the modified power allocation scheme, the BER constraint condition in (12) can be still met since

$$\begin{aligned}
\mathbb{E}P_b^{(i)} &= \int_{\overline{\lambda}_{\text{out}}(i)}^{\infty} \xi_i Q(\sqrt{\beta_i \text{SNR}_i}) f_i(\lambda_i) d\lambda_i \\
&= \int_{\overline{\lambda}_{\text{out}}(i)}^{\infty} \xi_i Q(\sqrt{\beta_i p_i \lambda_i}) f_i(\lambda_i) d\lambda_i \\
&= \int_{\overline{\lambda}_{\text{mea}}(i)}^{\infty} \xi_i Q(\sqrt{\beta_i p_i \lambda_i}) f_i(\lambda_i) d\lambda_i + \int_{\overline{\lambda}_{\text{out}}(i)}^{\overline{\lambda}_{\text{mea}}(i)} \xi_i Q(\sqrt{\beta_i p_i \lambda_i}) f_i(\lambda_i) d\lambda_i \\
&\leq \int_{\overline{\lambda}_{\text{mea}}(i)}^{\infty} \frac{\xi_i}{c(\widetilde{\text{SNR}}(i))} e^{-\beta_i p_i \lambda_i/2} f_i(\lambda_i) d\lambda_i + \int_{\overline{\lambda}_{\text{out}}(i)}^{\overline{\lambda}_{\text{mea}}(i)} \frac{\xi_i}{2} e^{-\beta_i p_i \lambda_i/2} f_i(\lambda_i) d\lambda_i \\
&\approx \overline{P}_b(i) \int_{\overline{\lambda}_{\text{mea}}(i)}^{\infty} \frac{\overline{\lambda}_{\text{out}}(i)}{\lambda_i \Delta(i)} f_i(\lambda_i) d\lambda_i + \overline{P}_b(i) \int_{\overline{\lambda}_{\text{out}}(i)}^{\overline{\lambda}_{\text{mea}}(i)} \frac{\overline{\lambda}_{\text{out}}(i)}{\lambda_i \Delta(i)} f_i(\lambda_i) d\lambda_i \\
&= \overline{P}_b(i) \int_{\overline{\lambda}_{\text{mea}}(i)}^{\infty} \frac{\overline{\lambda}_{\text{out}}(i)}{\lambda_i \Delta(i)} f_i(\lambda_i) d\lambda_i + \overline{P}_b(i) \int_{\overline{\lambda}_{\text{out}}(i)}^{\overline{\lambda}_{\text{mea}}(i)} \frac{\overline{\lambda}_{\text{out}}(i)}{\lambda_i \Delta(i)} f_i(\lambda_i) d\lambda_i \\
&= \overline{P}_b(i) \overline{P}_o(i).
\end{aligned} \tag{50}$$

Moreover, we can verify the fact that if (37) holds, the optimal solution (49) exits.

Accordingly, the ATP for i-th subchannel is derived again and Proposition 1 is modified as follows:

Proposition 2: Suppose that $\overline{P}_b(i) \leq \frac{\xi_i}{2} \frac{\overline{\lambda}_{\text{out}}(i)}{\overline{\lambda}_{\text{mea}}(i)}$. Let $\tilde{\rho}^{(i)}(\overline{P}_b(i), P_{\text{out}}^{(i)})$ denote the average needed transmit power for i-th data stream achieving the BER given by (48) under the condition that the OP $P_{\text{out}}^{(i)}$ is given. Then

$$\begin{aligned}
\tilde{\rho}^{(i)}(\overline{P}_b(i), P_{\text{out}}^{(i)}) &= \hat{\rho}^{(i)}(\overline{P}_b(i), P_{\text{out}}^{(i)}) - \rho_s(\widehat{\text{SNR}}(i) - \widetilde{\text{SNR}}(i), \overline{\lambda}_{\text{mea}}(i)) \\
&= \rho_s(\widehat{\text{SNR}}(i), \overline{\lambda}_{\text{out}}(i)) - \rho_s(\widehat{\text{SNR}}(i) - \widetilde{\text{SNR}}(i), \overline{\lambda}_{\text{mea}}(i)) + \rho_\Delta(\overline{\lambda}_{\text{out}}(i)).
\end{aligned} \tag{51}$$

V. Numerical Results and Comparison

In all of our simulation, we always make use of BPSK modulation for each data stream transmission, which corresponds to the modulation parameters $\xi_i = 1, \beta_i = 2, i = 1, 2, \ldots, m$. For simplicity, we let each data stream have the same constraint parameters, i.e.,

$$P_{\text{out}}^{(1)} = P_{\text{out}}^{(2)} = \ldots = P_{\text{out}}^{(i)} = P_{\text{out}}, \tag{52}$$

and

$$\overline{P}_b(1) = \overline{P}_b(2) = \ldots = \overline{P}_b(m) = P_b. \tag{53}$$

We first observe the behavior of MIMO individual outage probability using Lemma 1. In order to provide convenience for making OP comparison between SISO and MIMO systems, we first evaluate outage probability $P_{\text{out}} = 10^{-\upsilon}$ for SISO systems by setting exponent υ. And we call υ as a SISO outage exponent (OE). For example, we set the OE $\upsilon = 1$, then $P_{\text{out}} = 10^{-1}$ and $\lambda_{\text{out}} = 1.1 \cdot 10^{-1}$ for the SISO system, and under given $\lambda_{\text{out}} = 1.1 \cdot 10^{-1}$ we can compute further $P_{\text{out}} = 6.6 \cdot 10^{-5}$ for the MIMO system with $n = 6$, $m = 3$, and $i = 3$. Table II provides computed results for the MIMO system with $n = 6$, $m = 3$, and $i = 3$ when υ is set from 0.4 to 1.8. Table II shows that the MIMO system has lower individual OP as υ increases, and almost has no outage when $\upsilon \geq 1.6$. In the following, if needed, we will always set $\lambda_{\text{out}} = 1.1 \cdot 10^{-1}$, whose corresponding OE is $\upsilon = 1$.

We now consider the constraint condition of BER in optimization design which is given in (37). Fig.2 plots the constrained BER for the MIMO system with $m = 3$ and $n = 6$ when the OE is set appropriately from 1 to 2. From this figure, the constraint condition is easily met for any of the three data streams $i = 1, 2, 3$.

We still fix the minimum antenna number $m = 3$ and the maximum antenna number $n = 6$. Fig.3 plots the individual ATP for the two adaptive transmit schemes produced using the new and old upper bounds of Q function for $i = 1, 2, 3$. It can be observed that the ATP increases gradually as i increases, which implies that the channel condition becomes worse. On the other hand, the power allocation with the new upper bound (UB) has more power saving than the one with the old UB for all $i = 1, 2, 3$.

Finally, we fix $m = 3$ and $i = 2$. Fig.4 plots the individual ATP computed by Proposition 2 for different n. It can be observed that as the maximum number of antennas n increases, the needed ATP decreases, but the amount of ATP improvement becomes gradually small. For comparison, this figure also includes the BER curve with the traditional UB of Q function BER $= \frac{1}{2}e^{-\widehat{\text{SNR}}}$. It can be found from this figure that all of the three different MIMO configurations have the reliable performance of exponential average BER.

VI. Conclusions

It is well known that multiple antennas can provide high multiplexing and diversity gains for wireless communications. Adaptive transmission techniques in wireless communications can utilize the system resources efficiently and provide satisfactory QoS. In this paper, we have investigated adaptive transmission technique mainly based on channel eigenvalues for MIMO multi-beams systems. Under the BER and OP constraints, we have presented the closed-form expressions for the minimum average transmit power and individual outage probability. Our theoretical analysis further shows that in fading environments wireless communications employing multiple antennas can also achieve the exponential BER performance, as in AWGN channels.

Appendix

The proof of Proposition 1: Since $\overline{P}_b(i) \leq \frac{\xi_i}{2}\frac{\overline{\lambda}_{\text{out}}(i)}{\overline{\lambda}_{\text{mea}}(i)}$, then it follows from Lemma 2 that $\lambda_0(i) = \overline{\lambda}_{\text{out}}(i)$. Furthermore, we can have

$$\hat{\rho}^{(i)}(\overline{P}_b(i), P_{\text{out}}^{(i)}) = \int_{\overline{\lambda}_{\text{out}}(i)}^{\infty} p_i f_i(\lambda_i) d\lambda_i. \tag{54}$$

Substituting (26) into (54), we have

$$\hat{\rho}^{(i)}(\overline{P}_b(i), P_{\text{out}}^{(i)}) = \int_{\overline{\lambda}_{\text{out}}(i)}^{\infty} \frac{\widehat{\text{SNR}}(i)}{\lambda_i} f_i(\lambda_i) d\lambda_i + \int_{\overline{\lambda}_{\text{out}}(i)}^{\infty} \frac{2}{\beta_i \lambda_i} \ln(\frac{\lambda_i \Delta(i)}{\overline{\lambda}_{\text{out}}(i)}) f_i(\lambda_i) d\lambda_i. \tag{55}$$

Define

$$\rho_s(\widehat{\text{SNR}}(i), \overline{\lambda}_{\text{out}}(i)) = \int_{\overline{\lambda}_{\text{out}}(i)}^{\infty} \frac{\widehat{\text{SNR}}(i)}{\lambda_i} f_i(\lambda_i) d\lambda_i \tag{56}$$

and

$$\rho_{\Delta}(\overline{\lambda}_{\text{out}}(i)) = \int_{\overline{\lambda}_{\text{out}}(i)}^{\infty} \frac{2}{\beta_i \lambda_i} \ln(\frac{\lambda_i \Delta(i)}{\overline{\lambda}_{\text{out}}(i)}) f_i(\lambda_i) d\lambda_i. \tag{57}$$

Now we consider to derive (56) and (57), respectively. From Lemma 1 in [36], the marginal p.d.f. of the i-th largest eigenvalue λ_i can be written as

$$f_i(\lambda_i) = \sum_{k=i}^{m} (-1)^{k-i} \binom{k-1}{i-1} \binom{m}{k} f_{\text{min:}k}(\lambda_i) \tag{58}$$

where $f_{\text{min:}k}(x)$ denotes the p.d.f. of the smallest random variable considered in a subset of k random variables over the set of all eigenvalues, and is given by

$$\begin{aligned} f_{\text{min:}k}(x) &= \frac{kC}{m!} \sum_{\alpha} \sum_{\mu} \text{sgn}(\alpha)\text{sgn}(\mu) A_k(\alpha, \mu) \\ &\times e^{-kx} \sum\nolimits_{\tau} x^{\theta + \alpha_k + \mu_k - 2 + \sum_{\iota=1}^{k-1} \tau_\iota} \\ &\times \prod_{\iota=1}^{k-1} \frac{(\theta + \alpha_\iota + \mu_\iota - 2)!}{\tau_\iota!}. \end{aligned} \tag{59}$$

So with the help of the complementary incomplete gamma function $\Gamma(q,x)$, we can obtain the desired result (40) after a simple derivation.

The derivation of (57) is similar, but involves a process employing the following special function $\jmath_q(x)$ defined as [38]:

$$\begin{aligned}\jmath_q(x) &= \int_1^\infty t^{q-1}\ln t e^{-xt}dt \\ &= \frac{(q-1)!}{x^q}\sum_{k=0}^{q-1}\Gamma(k,x)/k!. \end{aligned} \tag{60}$$

Finally, again making use of (58), we can easily obtain the desired expression of $\rho_\Delta(\overline{\lambda}_{\text{out}}(i))$ (42).

REFERENCES

[1] Telatar, I. E. : 'Capacity of multi-antenna Gaussian channels', *Eur. Trans. Telecomm.*, 1999, **10**,(6), pp. 585-596

[2] Kiessling, M. : 'Unifying analysis of ergodic MIMO capacity in correlated Rayleigh fading environments', *Eur. Trans. Telecomm.*, 2005, **16**, (1), pp. 17-35

[3] Jin, S. , McKay, M. R. , Gao, X. , Collings, I. B. : 'MIMO multichannel beamforming: SER and outage using new eigenvalue distributions of complex noncentral Wishart matrices', *IEEE Trans. Commun.*, 2008, **56**, (3), pp. 424-434

[4] Zheng, L. , Tse, D. N. : 'Diversity and multiplexing: A fundamental tradeoff in multiple antenna channels', *IEEE Trans. Inf. Theory*, 2003, **49**,(5), pp. 1073-1096

[5] Lozano, A. , Jindal, N. : 'Transmit diversity vs. spatial multiplexing in modern MIMO systems', *IEEE Trans. Wirel. Commun.*, 2010, **9**, (1), pp. 186-197

[6] Falou, A. E., Hamouda, W. , Langlais, C. , Nour, C. A. ,Douillard, C. : 'Finite-SNR diversity-multiplexing tradeoff for Rayleigh MIMO channels', *IEEE Commun. Lett.*, 2003, **17**, (4), pp. 753-756

[7] Caire, G. , Kumar, K. R. : 'Information theoretic foundations of adaptive coded modulation', *Proceedings of the IEEE*, 2007, **95**, (12), pp.2274-2298

[8] Hayes, J. F. : 'Adaptive feedback communication', *IEEE Trans. Commun. Technol.*, 1968, **Com-16**, pp. 29-34

[9] Palomar, D. P. , Cioffi, J. M. , Lagunas, M. A. : 'Joint Tx-Rx beamforming design for multicarrier MIMO channels: a unified framework for convex optimization', *IEEE Trans. Signal Process.*, 2003, **51**, (9), pp. 2381-2401

[10] Palomar, D. P. , Cioffi, J. M. , Lagunas, M. A. : 'Uniform power allocation in MIMO channels: a game-theoretic approach', *IEEE Trans. Inf. Theory*, 2003, **49**, (7), pp. 1707-1727

[11] Ordóñez, L. G. , Palomar,D. P. , Fonollosa, J. R. : ' Ordered eigenvalues of a general class of Hermitian random matrices with application to the perforamance analysis of MIMO systems', *IEEE Trans. Signal Process.*, 2009, **57**, (2), pp. 672-689

[12] Ordóñez, L. G. , Palomar, D. P. , Pagès-Zamora, A., Fonollosa, J. R. : ' Minimum BER linear MIMO transceivers with adaptive number of substreams', *IEEE Trans. Signal Process.*, 2009, **57**, (6), pp. 2336-2353

[13] Zanella. A. , Chiani, M. : 'Reduced complexity power allocation strategies for MIMO systems with eigen value decomposition," *IEEE Trans. Veh. Technol.*, 2012, **61**, (9), pp. 4031-4041

[14] Xiong, F. : 'Digital Modulation Techniques', Second Edition (Artech House,Inc., 2006)

[15] Paulraj, A. , Nabar, R. , Gore, D. : 'Introduction to Space-Time Wireless Communications', (Cambridge University Press, 2003)

[16] Zhou, S. , Giannakis, G. B. : 'Optimal transmitter eigen-beamforming and space-time block coding based on channel correlations', *IEEE Trans. Inf. Theory*, 2003, **49**,(7), pp. 1673-1690

[17] Rangarajan, A., Sharma, V. , Singh, S. K.: ‘Information-theoretic and communication-theoretic optimal power allocation for fading channels’. Proc. IEEE Int. Symp. Inf. Theory (ISIT), Yokohama, Japan, 2003, p. 246

[18] Rangarajan A. , Sharma, V. : ‘Achieving exponential diversity order in Rayleigh-fading channels’. Proc. Nat. Conf. Commun. (NCC), Bangalore, Jan. 2004

[19] Sharma, V. , Premkumar, K. , Swamy, R. N. : ‘Exponential diversity acheiving spatio-temporal power allocation scheme for fading Channel’, *IEEE Trans. on Inf. Theory*, 2008, **54**, (1), pp. 188-208

[20] Premkumar, K. , Sharma, V. , Rangarajan, A. : ‘Exponential diversity achieving spatio-temporal power allocation scheme for fading channels’. DRDO-IISc Program on Mathematical Engineering, IISc, Bangalore 560 012, India, Tech. Rep., TR-PME-2004-08 [Online], Available: http://www.pal.ece.iisc.ernet.in/PAM

[21] Khan, M. Z. A. :‘Achieving exponential diversity in all fading channels’. 24th Biennial symposium on Commnunications, 2008, pp. 274-277

[22] Müller, A. , Speidel, J. : ‘ Achieving exponential diversity in wireless multihop systems with regenerative relays’. IEEE Interantional Conference on Commnunications (ICC’09), 2009.

[23] Ganesh, V. , Jalihal, D. : ‘Power Allocation For MISO Channel With Co-ordinate Interleaving technique,’ *IEEE Signal Process. Lett.*, 2007, **14**, (5), pp. 309-312

[24] Reddy, P. H. , Kumar, V. N. , Khan, M. Z. A. , Srinivas, M. B. : ‘Optimal power allocation in space and time in MISO Rayleigh fading channels with peak to average power ratio constraint’. 2007 IEEE Sarnoff Symposium, 2007

[25] Khan, M. Z. A.: ‘Achieving exponential diversity with spatio-temporal power allocation with imperfect channel state information’. Proc. Nat. Conf. Commun. (NCC), 2011

[26] Khan, M. Z. A. :‘On achieving exponential diversity with partial channel state information in MIMO fading channels’. 7th International Wireless Communications and Mobile Computing Conference (IWCMC), 2011, pp. 125-129

[27] Larrson, E. G., Stoica, P.: ’Space-Time Block Coding for Wireless Communications (Cambridge University Press, 2003)

[28] Li, G. Y., Xu, Z., Xiong, C., Yang, C., Zhang, S., Chen, Y., Xu, S.: ‘Energy-efficient wireless communications: tutorial, survey, and open issues’, *IEEE Wirel.Commun.*, 2011, **18**, (6), pp. 28-35

[29] Feng, D., Jiang, C., Lim, G., Cimini, Jr., L. J., Feng, G., Li, G. Y.: “A survey of energy-efficient wireless communications, ” *IEEE Commun. Surveys Tutorials*, 2013, **15**, (1), pp. 167-178

[30] Gupta, A. K., Nagar, D. K.: ’Matrix Variate Distributions’(Chapman and Hall/CRC, 2000)

[31] Raleigh, G. G. , Cioffi, J. M. : ‘Spatio-temporal coding for wireless communication’,’ *IEEE Trans. Commun.*, 1998, **46**, (3), pp. 357-366

[32] Lebrun, G., Ying, T, Faulkner,M.: ‘MIMO transmission over a timevarying channel using SVD’. Proc. IEEE Global Telecommunications Conference, Taipei, Taiwan, Nov. 2002, pp. 414-418

[33] Goldsmith, A.: ’Wireless Communications’, Chapter 6 (Cambrige University Press, 2005)

[34] Wang, Z., Giannakis, G. B.: ‘A simple and general parameterization quantifying performance in fading channels’, *IEEE Trans. Commun.*, 2003, **51**, (8), pp. 1389-1398

[35] Lee, Y. H., Bar-Ness, Y.: ‘Power adaptation for BPSK signaling with average and peak power constraints in Rayleigh fading channels’, *IEEE Trans. Commun.*, 2003, **51**, (11), pp. 1871-1876

[36] Zanella, A., Chiani, M.: ‘The PDF of the l-th largest eigenvalue of central Wishart matrices and its application to the performance analysis of MIMO systems’. IEEE Golbal Telecommunications Conference (GLOBECOM), 2008

[37] Andews, L. C.: ‘Speical Functions of Mathematics for Engineering’ (Oxford University Press, 1998)

[38] Alouini, M. S., Goldsmith, A.: ‘Capacity of Rayleigh fading channels under different adaptive transmission and diversity-combining techniques‘, *IEEE Trans. Veh. Technol.*, 1999, **48**, (4), pp. 1165-1181

TABLE I

MINIMIZATION PARAMETER c FOR THE NEW UPPER BOUND OF Q FUNCTION

BER	10^{-3}	$10^{-3.5}$	10^{-4}	$10^{-4.5}$	10^{-5}	$10^{-5.5}$	10^{-6}	$10^{-6.5}$	10^{-7}	$10^{-7.5}$	10^{-8}
SNR	6.8	7.7	8.4	9.0	9.6	10.1	10.5	10.9	11.3	11.7	12.0
c(SNR)	8.4	9.2	9.8	10.4	11.2	11.8	12.4	12.8	13.4	13.8	14.4

TABLE II

OUTAGE PROBABILITY COMPARISON BETWEEN SISO AND MIMO SYSTEMS

SISO OE	0.4	0.6	0.8	1.0	1.2	1.4	1.6	1.8
$\overline{\lambda}_{\text{out}}$	5.1×10^{-1}	2.9×10^{-1}	1.7×10^{-1}	1.1×10^{-1}	6.5×10^{-2}	4.1×10^{-2}	2.5×10^{-2}	1.6×10^{-2}
SISO OP	4.0×10^{-1}	2.5×10^{-1}	1.6×10^{-1}	1.0×10^{-1}	6.3×10^{-2}	4.0×10^{-2}	2.5×10^{-2}	1.6×10^{-2}
MIMO OP	2.0×10^{-2}	2.9×10^{-3}	4.3×10^{-4}	6.6×10^{-5}	1.0×10^{-5}	1.6×10^{-6}	2.5×10^{-7}	4.0×10^{-8}

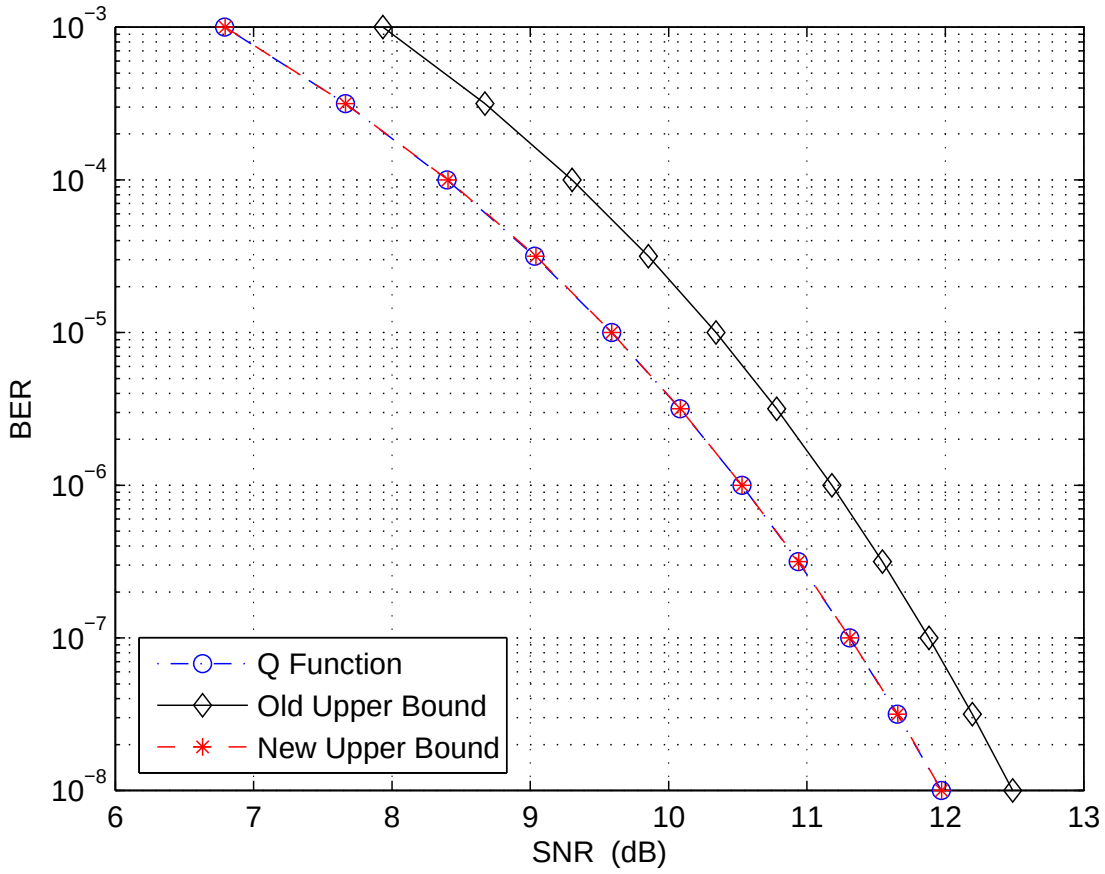

Fig. 1. BER comparison among Q function and its two upper bounds for different SNRs

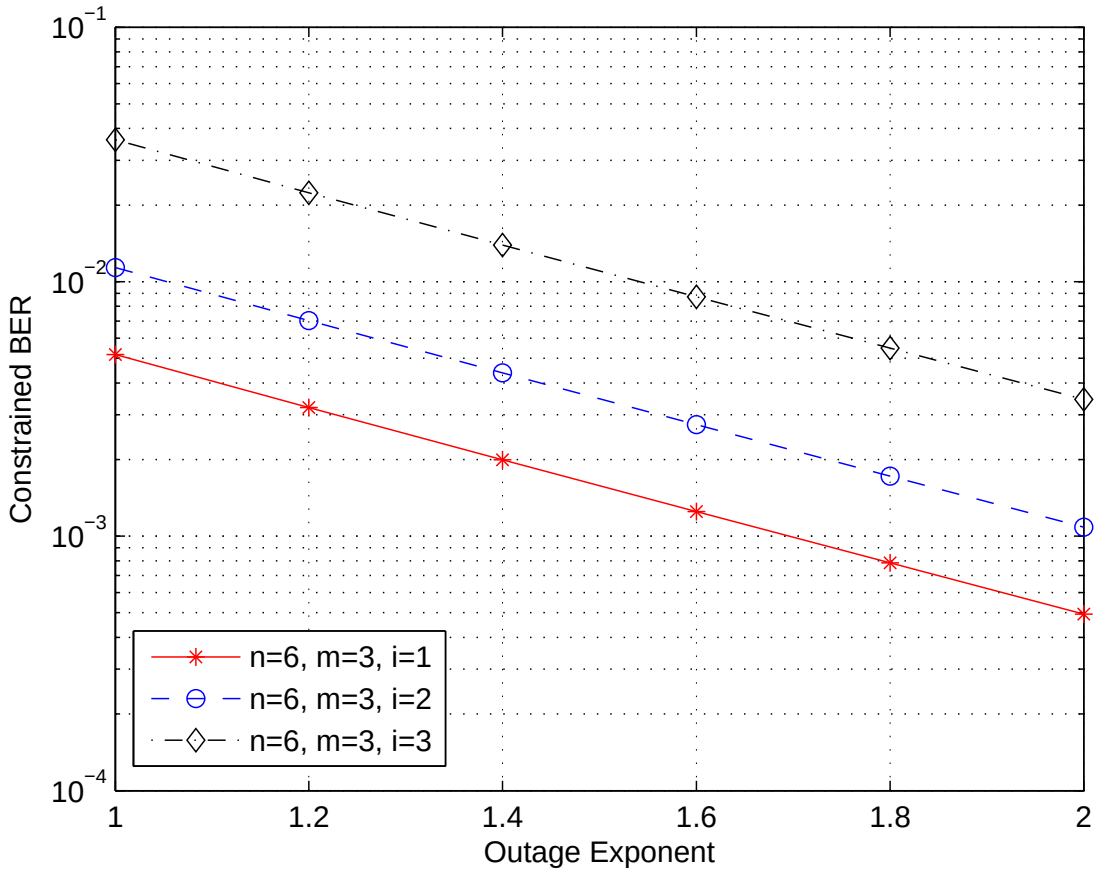

Fig. 2. Constrained BER under various SISO outage exponents

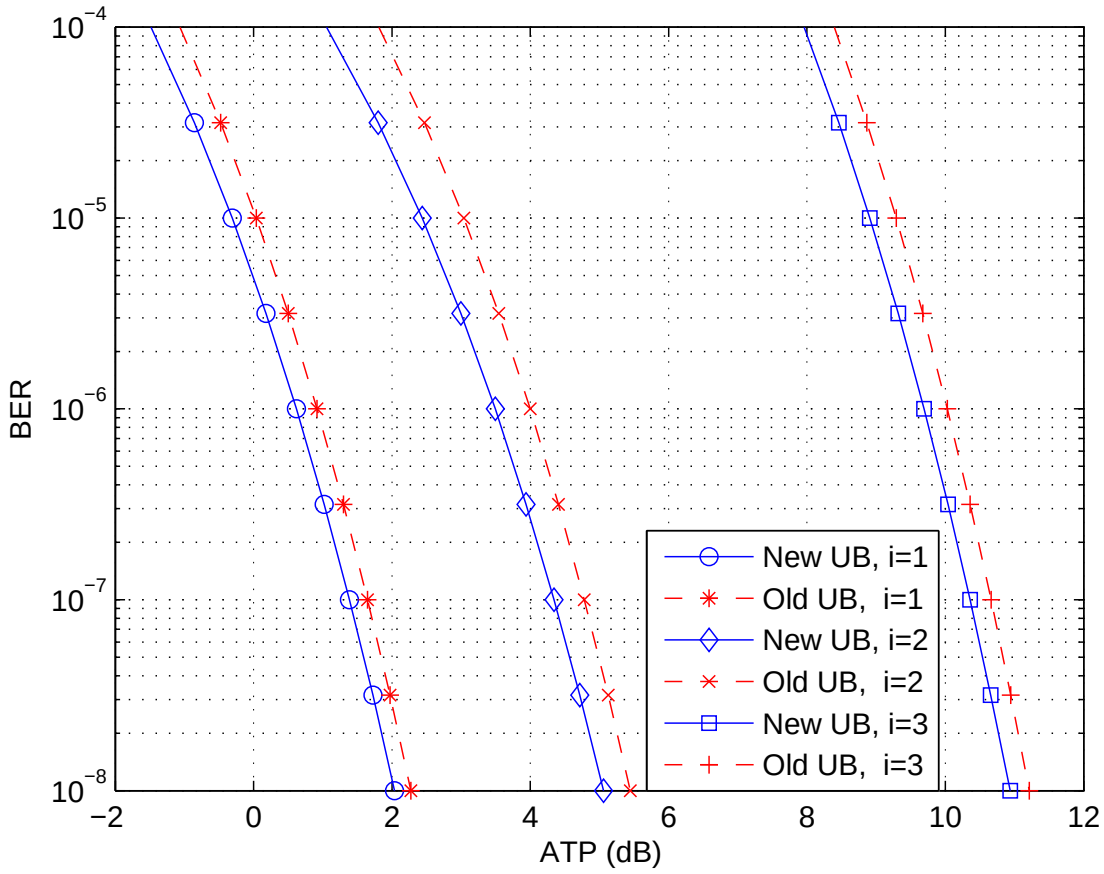

Fig. 3. ATP comparison between two power allocation schemes under different average BER constraints

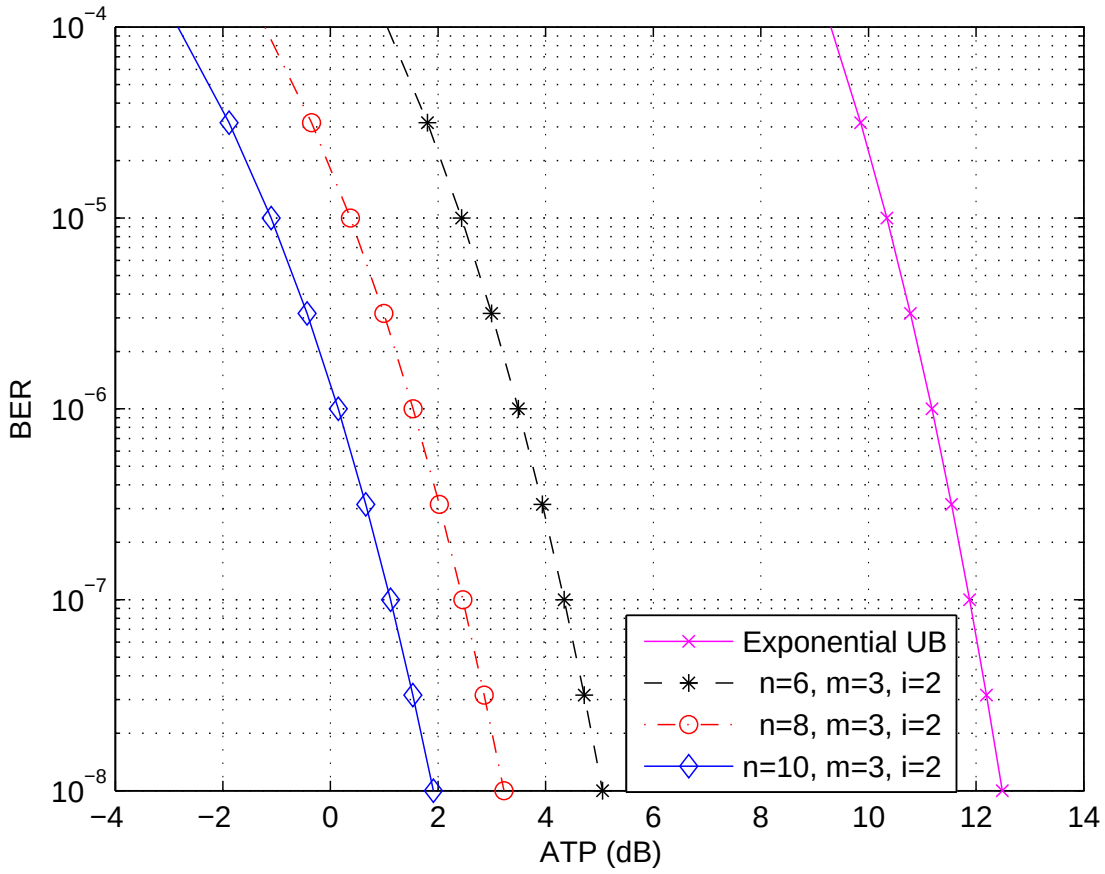

Fig. 4. ATP against the average BER for different n